

DISTRIBUTION KITS

"BASIC" RANGE

BASIC: distribution kit with pump "EASY" range with 12/24 volt DC or 230volt AC power supply. Supplied with all components for assembly of transfer group: electric pump, plastic manual nozzle, 4mt. Hose 19x27mm for art. DD3500 and DD3501, 4mt. 25x35mm for art. DD3504 (to use depending on customer's needs), pipes fitting, plastic suction filter and hose clamps for steel hoses.

BASIC PLUS: range but with pump "STANDARD" range and supplied with: metal pipes fitting - aluminum manual nozzle - steel suction filter - 4mt. Hose mm25x35





DD3500 12 Volt
DD3501 24 Volt



DD3504 230 Volt




DD3502 12 Volt
DD3503 24 Volt

	VOLT	W	A	LT'	IN	OUT	RPM		 cm	INCLUDES	
BASIC	DD3500	12		13	30	3/4"	3/4"	3500	7,7	46x46x26	pump "easy" type with cables and manual nozzle-clamps in aluminium , suction filter, mt.4 hose 19x27, pipe fittings
	DD3501	24		7	30	3/4"	3/4"	3500	7,7	46x46x26	
	DD3504	230	350		48	1"	1"	2800	10,5	46x46x26	
PLUS	DD3502	12		13	40	1"	1"	3500	8,5	46x46x26	pump "standard" type with cables and manual nozzle-clamps in aluminium , suction filter, mt.4 hose 25x35, pipe fittings
	DD3503	24		7	40	1"	1"	3500	8,5	46x46x26	

"EASY" KIT

DISTRIBUTION KIT
with pump 12/24 volt DC or 230volt AC power supply.
Flow rate from lt./' 40 to lt./' 74.

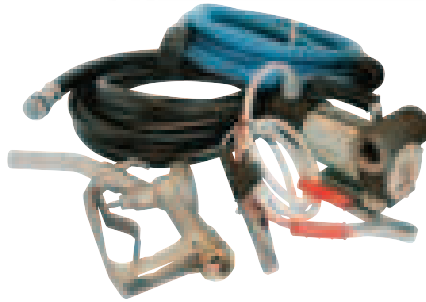

Kit complete with:
threaded suction tube (2,5mt for pumps 12/24 vlt DC and mt 4 for pumps 230 volt AC), 4 mt delivery hose and aluminum nozzle for manual or automatic dispensing.



DD3507 12 Volt
DD3511 24 Volt
DD3512 12 Volt
DD3513 24 Volt



DD3515 230 Volt - 56 lt/'
DD3518 230 Volt - 74 lt/'
DD3519 230 Volt - 56 lt/'
DD3520 230 Volt - 74 lt/'

	VOLT	W	A	LT'	IN	OUT	RPM		 cm	INCLUDES
DD3507	12		13	40	1"	1"	3500	7,7	46x46x26	pump "standard" type with cables and clamps - 2,5 mt suction hose - delivery hose mt.4 - suction filter - aluminium manual nozzle
DD3511	24		7	40	1"	1"	3500	7,7	46x46x26	
DD3512	12		13	40	1"	1"	3500	9,0	46x46x26	pump "standard" type with cables and clamps - 2,5 mt suction hose - delivery hose mt.4 - suction filter - aluminium manual nozzle - 60lt'
DD3513	24		7	40	1"	1"	3500	9,0	46x46x26	
DD3515	230	350		56	1"	1"	2800	10,3	46x46x26	pump "standard" type - 4 mt suction hose - delivery hose mt.4 - suction filter - aluminium manual nozzle
DD3518	230	400		74	1"	1"	2800	15,2	46x46x26	
DD3519	230	350		56	1"	1"	2800	10,7	46x46x26	pump "standard" type - 4 mt suction hose - delivery hose mt.4 - suction filter - aluminium manual nozzle - 60lt'
DD3520	230	400		74	1"	1"	2800	16,0	46x46x26	



DISTRIBUTION KITS

"DRUM" KIT

Transfer kit for 200lt Drums can be supplied with pumps 12/24 volt DC or 230 volt AC. Complete with: metal telescopic suction tube (max lenght cm110), bung adaptor for drum fixing, aspiration filter, nozzle handling, 4mt dispenser hose, aluminum manual nozzle




- DD3516** 12 Volt
- DD3517** 24 Volt
- DD3514** 230 Volt

	VOLT	W	A	LT'	IN	OUT	RPM		 cm	INCLUDES
DD3516	12		13	40	1"	1"	3500	5,3	24x53x53	pump "standard type" with cables and clamps - metal telescopic suction tube - drum bung adaptor - filter -
DD3517	24		7	40	1"	1"	3500	5,3	24x53x53	pump "standard type" with cables and clamps - metal telescopic suction tube - drum bung adaptor - filter -
DD3514	230	350		56	1"	1"	2800	9,8	24x53x53	pump "standard type" - metal telescopic suction tube - drum bung adaptor - filter -

DISTRIBUTION KITS

WALL MOUNTED KIT

The kit can be used: directly mounting the wall plate, on the tank edge or placed directly into a dispensing box. Can be supplied with pumps 12/24 volt DC or 230 AC. Consists of: steel mounting plate with painted finish, pump, 3 digits mechanical meter or orientable digital meter

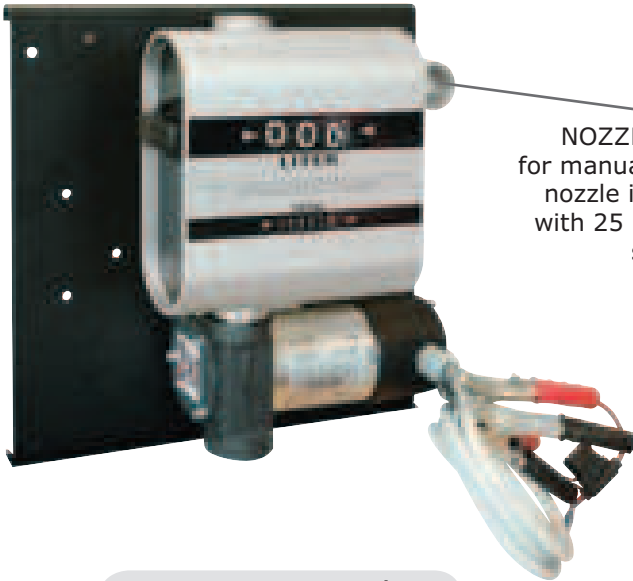



DD3508 - 12 Volt
DD3509 - 24 Volt

NOZZLE HOLDER
for manual or automatic
nozzle in aluminium
with 25 mm diameter
spout



DD3521 - 230 Volt

	VOLT	W	A	LT/''	IN	OUT	RPM		 cm	INCLUDES
DD3508	12		13	40	1"	1"	3500	9,8	37x37x23	pump "standard type" with cables and clamps - 3 digits mechanical meter - mounting plate - nozzle holder 25 mm diameter spout
DD3509	24		17	40	1"	1"	3500	9,8	37x37x23	
DD3521	230	350		56	1"	1"	2800	13	37x37x23	pump "standard type" 3 digits mechanical meter - mounting plate - nozzle holder 25 mm diameter spout
DD3605	230	350		56	1"	1"	2800	13	37x37x23	pump "standard type" - 3 digits orientable meter - mounting plate - nozzle holder 25 mm diameter spout

DD3605

WALL MOUNTED KIT WITH DIGITAL METER

like **DD3521**
but with digital meter DV3501



DISTRIBUTION KITS

PANEL KIT - 230 Volt PUMP

Open dispensing kit suitable for wall bracket or tank mounting.
 Consists of:
 230volt pump standard type
 with painted steel cover "C" shape,
 nozzle holder,
 3 digits mechanical meter,
 4mt delivery hose,
 automatic or manual nozzle,
 supplied with
 pump 230volt 56/74 lt/'





DD3505 - 56 lt/'
DD3506 - 74 lt/'

with manual nozzle



DD3522 - 56 lt/'
DD3523 - 74 lt/'

as DD3505-6
 but with automatic nozzle

	VOLT	W	LT/'	IN	OUT	RPM		 cm	INCLUDES
DD3505	230	350	56	1"	1"	2800	15,8	46x46x26	pump "standard" type - cover - 3 digits mechanical meter - 4 mt. Delivery hose - manual nozzle
DD3506	230	400	74	1"	1"	2800	20,9	46x46x26	pump "standard" type - cover - 3 digits mechanical meter - 4 mt. Delivery hose - automatic nozzle of 80 lt.'
DD3522	230	350	56	1"	1"	2800	16,2	46x46x26	
DD3523	230	400	74	1"	1"	2800	21,7	46x46x26	

DISTRIBUTION KITS

COMPACT KIT 230volt PUMP

Compact and handy diesel fuel dispenser, steel construction with powder coated finish to resist outside use , pump "Standard" range, 3 digits mechanical meter, 4mt dispensing hose, automatic dispensing nozzle of 60 lt/' (with pump 56 lt/') and 80 lt./' (with pump 74 lt./'), system to switch on/off pump, vibration-damping assembled under the pump. Availability of pump 230 volt power supply and 56 or 74 lt./'. Kit is also available in a stainless steel version (AISI 304 for extreme environments)

PAINTED version

DD3529 - 56 lt/'

DD3533 - 74 lt/'





STAINLESS STEEL version

DD3510 - 56 lt/'

DD3524 - 74 lt/'



		VOLT	W	LT/'	IN	OUT	RPM		 cm	INCLUDES
STAN- DARD	DD3529	230	350	56	1"	1"	2800	21	41x31x91	Pump "standard" type - compact box -3 digits mechanical meter - 4 mt. Delivery hose - automatic nozzle of 60 lt./'- automatic switch on/off. Supplied without pedestal
	DD3533	230	400	74	1"	1"	2800	25	41x31x91	
INOX	DD3510	230	350	56	1"	1"	2800	21	41x31x91	STAINLESS STEEL VERSION - pump "standard" type - compact box -3 digits mechanical meter - 4 mt. Delivery hose - automatic nozzle of 60 lt./'-automatic switch on/off. Supplied without pedestal
	DD3524	230	400	74	1"	1"	2800	25	41x31x91	

DISTRIBUTION KITS

COMPACT kit with PEDESTAL 230 volt pump

Compact and handy diesel fuel dispenser, steel construction with powder coated finish to resist outside use and with pedestal, pump "Standard" range, 3 digits mechanical meter, 4mt dispensing hose, automatic dispensing nozzle of 60 lt/' (with pump 56 lt/') and 80 lt.' (with pump 74 lt.'), system to switch on/off pump, vibration-damping assembled under the pump. Availability of pump 230 volt power supply and 56 or 74 lt/'. Kit is also available in a stainless steel version (AISI 304 for extreme environments)

PAINTED version

DD3526 - 56 lt/'

DD3525 - 74 lt/'



PEDESTAL

DV9505 - painted

DV9506 - stainless steel



Dim. cm 31x41x91
Weight Kg.12,5



STAINLESS STEEL version

DD3534 - 56 lt/'

DD3535 - 74 lt/'

		VOLT	W	LT/'	IN	OUT	RPM		 cm	INCLUDES
STAN- DARD	DD3525	230	400	74	1"	1"	2800	36	41x31x135	pump "standard" type - compact box -3 digits mechanical meter - 4 mt. Delivery hose - automatic nozzle of 60 lt.' - automatic switch on/off. Supplied with pedestal
	DD3526	230	350	56	1"	1"	2800	32	41x31x135	
INOX	DD3534	230	350	56	1"	1"	2800	32	41x31x135	STAINLESS STEEL VERSION - pump "standard" type - compact box -3 digits mechanical meter - 4 mt. Delivery hose - automatic nozzle of 60 lt.' - automatic switch on/off. Supplied with pedestal
	DD3535	230	400	74	1"	1"	2800	36	41x31x135	

DISTRIBUTION KITS

BOX KIT

Diesel fuel dispenser enclosed in a steel painted cabinet with lock, ideal for distribution units with tank.
Possibility to customize, offered with the standard 56 lt./' pump.
Can be equipped with mechanical or digital meter, hose-reel, filter or level control.

BOX KIT easy 2
30 volt pump 56 lt./'
standard range





DD3536
DD3528
DD3537



DD3527

BOX KIT with pump 230 volt
56 lt./' **such as DD3537**
with: hose-reel, filter and LED signal

	VOLT	W	LT/'	IN	OUT	RPM		 cm	INCLUDES
DD3536	230	350	56	1"	1"	2800	31	56x30x75	pump "standard" type - compact box - 3 digits mechanical meter - 4 mt delivery hose - automatic nozzle of 60 lt./'
DD3528	230	350	56	1"	1"	2800	34	56x30x75	pump "standard" type - compact box - 3 digits mechanical meter - 4 mt delivery hose - automatic nozzle of 60 lt./' - pump master control -
DD3537	230	350	56	1"	1"	2800	35	56x30x75	pump "standard" type - compact box - 3 digits mechanical meter - 4 mt delivery hose - automatic nozzle of 60 lt./' - pump master control - magnetic level sensor -
DD3527	230	350	56	1"	1"	2800	55	56x30x75	pump "standard" type - compact box - 3 digits mechanical meter - automatic nozzle of 60 lt./' - pump master control - magnetic level sensor - LED signal - key selector - separating filter - hose reel 7 mt. hose 3/4"
DD3538	230	350	56	1"	1"	2800	56	56x30x75	pump "standard" type - compact box - 3 digits mechanical meter - automatic nozzle of 60 lt./' - pump master control - magnetic level sensor - LED signal - key selector - separating filter - hose reel 7 m hose 3/4"



DD3538

BOX KIT
such as DD3527
but with digital meter



DV9504



STEEL BOX with powder coated finish
Dim. mm 560x300x750 - Weight Kg 16,5